


PIN	SYMBOL
1	CS1
2	RES
3	A0
4	WR
5	RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6
13	D7
14	VSS
15	NC
16	NC
17	V0
18	XV0
19	NC
20	NC
21	VG
22	NC
23	NC
24	NC
25	NC
26	C86
27	P/S
28	VDD

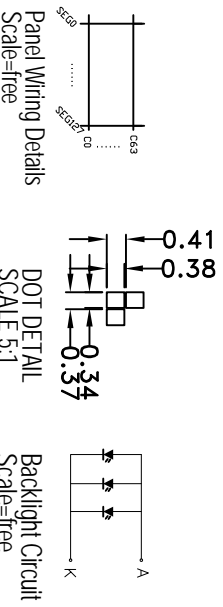

*1. LCD Display Type		STN/YG, Transmissive, Positive	
*2. Viewing Direction	6H	*6. Storage Temp	-30°C~80°C
*3. LCD Driver Mode	1/64Duty, 1/9Bias	*7. Driver IC	ST7567
*4. Operating Voltage	3.3V	*8. Backlight	WHITE V _F =3.0V I _F =45mA
*5. Operating Temp	-20°C~70°C	*9. ROHS	

HOT DISPLAY

Dwg Title		HTG12864-93-05W-28C05-V02	
EDC No.		Veri	
Scale	Unit	Tol.	Veri
1:1	mm	±0.3	A/0
Drawn	Checked	Date:	
LIWEI		2018-04-08	