

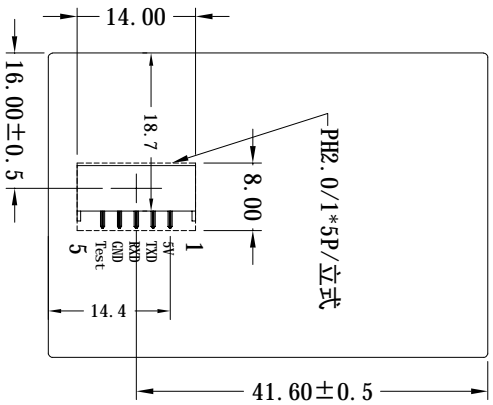
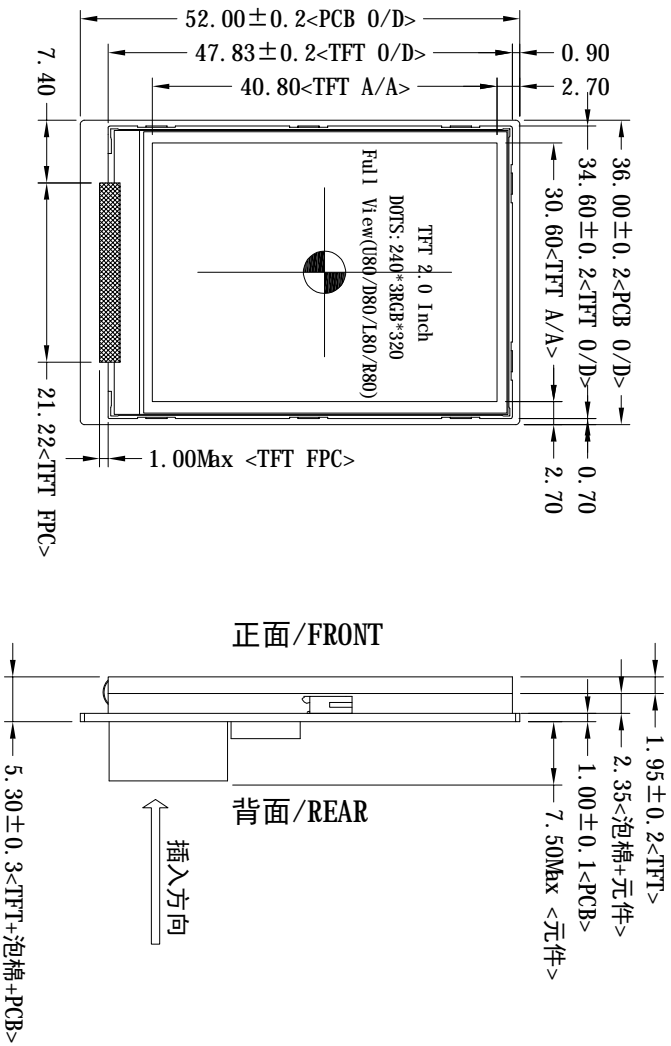


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

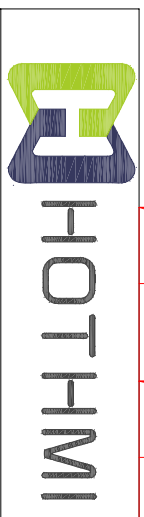

| Pin_SIGNAL | Pin_SIGNAL |
|------------|------------|
| 1 | +5V |
| 2 | TXD |
| 3 | RXD |
| 4 | GND |
| 5 | Test |

| | |
|--------------------------------|--------------------------------------------------------------------|
| 液晶显示类型 LCD Display Type | 薄膜晶体管/透射式/常黑/262K 色 TFT/Transmissive/Normal Ly Black/262K COLOR |
| 观看方向/角度 Viewing Direction | Full View (U80/D80/R80/L80) |
| 接口 Interface | UART (TTL) |
| 工作电压 Operating Voltage | +5V/1A |
| TFT 工作温度 TFT Operating Temp | -10 °C ~ 60 °C |



产品型号
Product model
LCM-EU020T61NL

| | | | | | |
|-------------|------|----------------|----------|------------|------------|
| 比例 Scale | 1:1 | 设计制图 Design | Li u. YL | 日期 Date | 2022-08-10 |
| 版本 Ver | V0-0 | 单位 Unit | MM | 公差 Tol. | ±0.3 |