



\*\*\*为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。  
 \*\*\*In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.  
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

字体：黑体  
 bold (typeface)

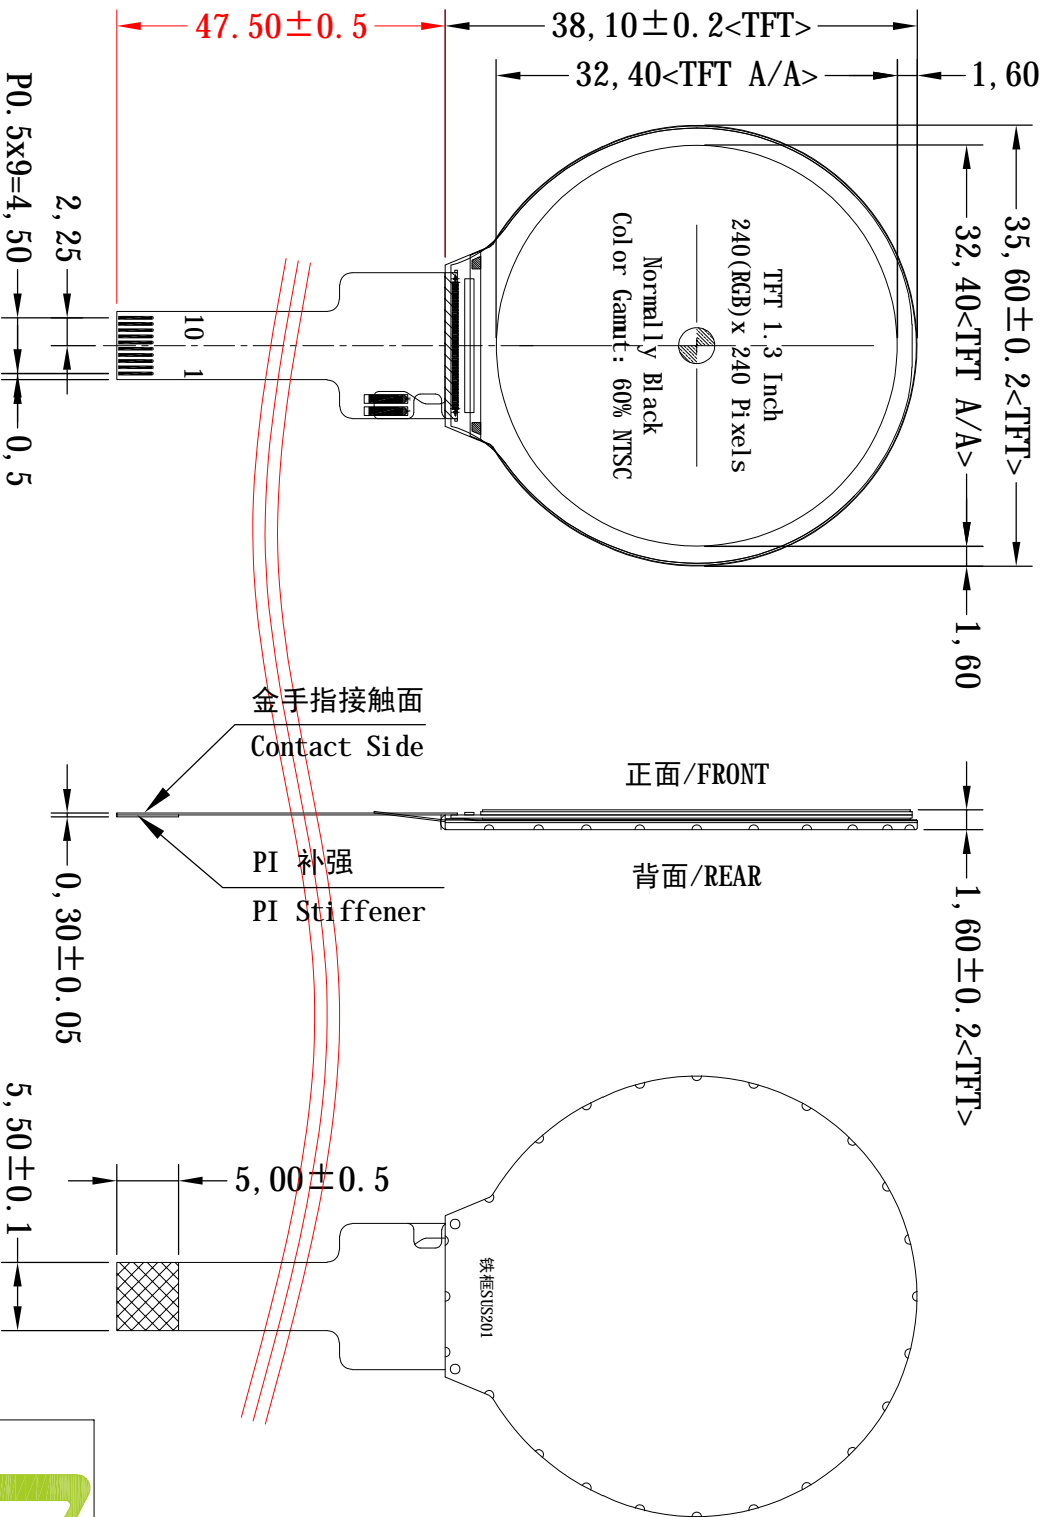

Pin_SIGNAL	Pin_SIGNAL
1	LEDA
2	VCI
3	CS
4	RESX
5	SCL
6	SDA
7	D/CX
8	TE
9	LEDK
10	GND

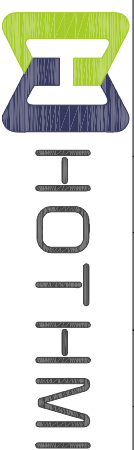

产品型号  
 Product model  
**TFT-H013A6QQ1GC5N10**

比例 Scale	1 : 1	设计制图 Design	Li u. YL	日期 Date	2024-12-12
版本 Ver	V2-0	单位 Unit	MM	公差 Tol.	$\pm 0.3$

观看方向/角度 Viewing Direction	U85/D85/L85/R85(Typ.)	TFT 储存温度 TFT Storage Temp	-20 °C ~ +70 °C
接口 Interface	4-wire 8-bit data serial interface	TFT 储存温度 TFT Storage Temp	-30 °C ~ +80 °C
工作电压 Operating Voltage	VCI=+3.2±0.2V	背光驱动条件 Backlight conditions	Vf= 3.0 ~ 3.4V, If=40mA
驱动芯片 Driver IC	GC9A01 <TFT>	液晶模组亮度 LCM Brightness	500 cd/m <sup>2</sup> (Typ)/恒流